

Free Motion Thread Fabric

Supply List:

Sticky Water Soluble Stabilizer (NOTE: must be Water Soluble and Sticky)

- OESD Aquamesh Plus
- Sulky Fabri-Solvly

Water Soluble Stabilizer – Clear topping – one of the following

- OESD Badge Master – Wash Away
- OESD AquaFilm Topping – Wash Away
- Sulky Super Solvy – Water Soluble
- Baby Lock Aqua Melt Topping – Water Soluble
- World Weindner CQ1022000W10 – Water Soluble (Amazon)


Scraps of threads, yarns, cords, trimmings of fabric from squaring blocks, serger threads, etc.

Sewing Machine able to do free motion stitching

Threads for sewing – Aurifil, Isacord, Rayon, Polyester, etc.

Sewing Machine able to do free motion stitching

Fabric Softener (only a small amount)

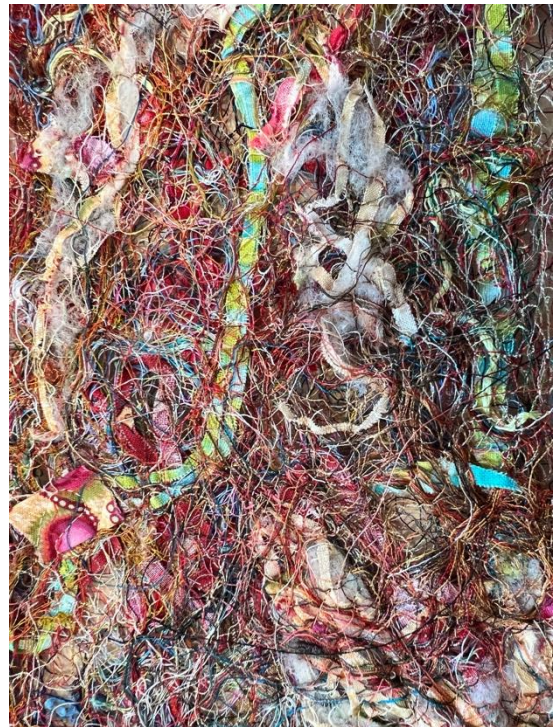

Process:

- Cut a piece of Sticky Water Soluble stabilizer to size that is easy to work with and can be any size you wish.
- Select types of thread/yarn scraps to be used. These could be the threads you pull forward through your machine when clipped, pieces of yarn, roving, trimming from blocks when squaring, cording, or anything else you would like to add.
 - Lay out the threads on the sticky stabilizer in any design you desire
 - Threads can be overlapped to have one side have more design than the background
 - Once finished, lay the clear topping over piece
 - Pin into place, spaced enough to hold it but not get in the way of stitching
- Free motion stitch over the whole piece keeping your stitches $\frac{1}{4}$ " minimum apart. Don't leave big spaces in your stitching). The goal is to make sure all the fabric pieces are secured in all directions.
- Once piece is completely stitched, place into hot soapy water to wash the stabilizer residue off threads.
 - Swish it around and sometimes one drop of fabric softener will help remove the stabilizer.
 - Rinse well and hang to dry
- Your thread fabric piece is ready to be used in a project.

